

Spare part SIMATIC DP, Extended module EM 142, ET 200X 4
DA DC 24V/2A, 5-pole M12, IP65 for all basic modules

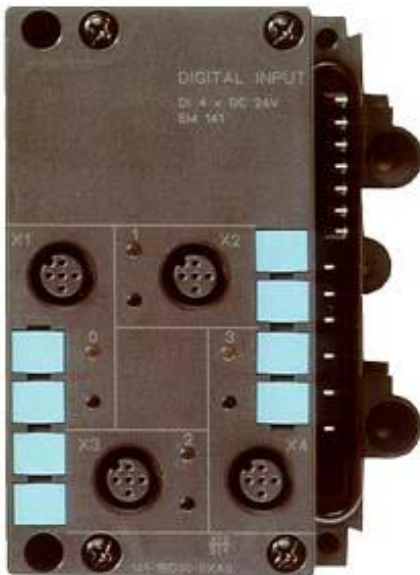


Figure similar

Input current	
from load voltage 2L+ (without load), max.	12 mA
from backplane bus 5 V DC, max.	28.5 mA
Power loss	
Power loss, typ.	2.1 W
Digital outputs	
Number of digital outputs	4
Short-circuit protection	Yes; Electronic
• Response threshold, typ.	3 A
Limitation of inductive shutdown voltage to	Typ. (2L+) -47 V
Controlling a digital input	Yes
Switching capacity of the outputs	
• on lamp load, max.	10 W
Load resistance range	
• lower limit	12 Ω
• upper limit	4 kΩ

Output voltage	
• for signal "1", min.	2L+ (-0,8 V)
Output current	
• for signal "1" rated value	2 A; at 24 V DC
• for signal "1" permissible range, min.	5 mA
• for signal "1" permissible range, max.	2.4 A
• for signal "0" residual current, max.	0.5 mA
Parallel switching of two outputs	
• for uprating	No
• for redundant control of a load	Yes; only outputs of the same group
Switching frequency	
• with resistive load, max.	100 Hz
• with inductive load (acc. to IEC 60947-5-1, DC13), max.	0.5 Hz
• on lamp load, max.	1 Hz
Total current of the outputs (per module)	
all mounting positions	
— up to 20 °C, max.	6 A
— up to 55 °C, max.	4 A
Cable length	
• unshielded, max.	30 m
Interrupts/diagnostics/status information	
Alarms	No
Diagnostics indication LED	
• Status indicator digital output (green)	Yes
Potential separation	
between backplane bus and all other circuit components	Yes
Potential separation digital outputs	
• between the channels	No
Permissible potential difference	
between different circuits	75 V DC/60 V AC
Isolation	
Isolation tested with	500 V DC
Dimensions	
Width	87 mm; Width module 60 mm
Height	110 mm
Depth	55 mm
Weights	
Weight, approx.	250 g

last modified:

05/25/2019