


## Miniature Fuses

Very HRC Fuses 5x20  
FA/FB Very Fast Acting  
125V to 250V from 0.04 to 20A



UL recognized E90660

### Dimensions

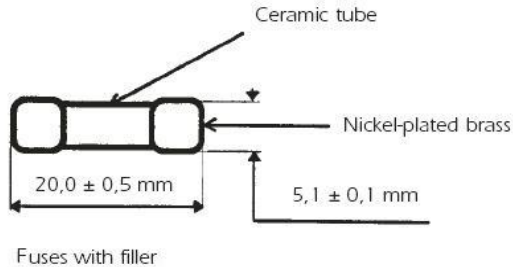

Product weight: 1.2g max.

Packaging: in blister of 50 pieces.

Ask us about boxes of 1000 pieces

Catalog Number	Reference Number	Rated Voltage (V)	Nominal Current (A)	Breaking capacity under 250V (A)	Pre-arcing I <sup>2</sup> t @ Rated voltage (A <sup>2</sup> s)	Clearing I <sup>2</sup> t @ Rated Voltage (A <sup>2</sup> s)	Max. voltage drop (V)
MI5FB25V0.04	K084051	250	0.04*	Cos $\mu \geq 0.7^{**}$	0.00013	0.0004	1.5
MI5FB25V0.05	Q080468	250	0.05*	Cos $\mu \geq 0.7^{**}$	0.0002	0.0006	1.5
MI5FB25V0.063	N084054	250	0.063*	Cos $\mu \geq 0.7^{**}$	0.00041	0.0012	1.3
MI5FB25V0.08	P080467	250	0.08*	Cos $\mu \geq 0.7^{**}$	0.00077	0.0022	1.1
MI5FB25V0.1	L084052	250	0.1*	Cos $\mu \geq 0.7^{**}$	0.00131	0.0037	1.1
MI5FA25V0.125	L084029	250	0.125	Cos $\mu \geq 0.2^{***}$	0.00077	0.0021	1.7
MI5FA25V0.16	F084001	250	0.16	Cos $\mu \geq 0.2^{***}$	0.002	0.006	1.3
MI5FA25V0.2	Y084017	250	0.2	Cos $\mu \geq 0.2^{***}$	0.0046	0.013	1.1
MI5FA25V0.25	G084002	250	0.25	Cos $\mu \geq 0.2^{***}$	0.009	0.025	1
MI5FA25V0.315	Z084018	250	0.315	Cos $\mu \geq 0.2^{***}$	0.016	0.045	0.9
MI5FA25V0.4	A084019	250	0.4	Cos $\mu \geq 0.2^{***}$	0.03	0.085	0.85
MI5FA25V0.5	H084003	250	0.5	Cos $\mu \geq 0.2^{***}$	0.05	0.15	0.8
MI5FA25V0.63	X084016	250	0.63	Cos $\mu \geq 0.2^{***}$	0.12	0.35	0.7
MI5FA25V0.8	C084021	250	0.8	Cos $\mu \geq 0.2^{***}$	0.25	0.72	0.6
MI5FA25V1	J084004	250	1	Cos $\mu \geq 0.2^{***}$	0.11	0.25	0.46
MI5FA25V1.25	K084005	250	1.25	Cos $\mu \geq 0.2^{***}$	0.26	0.65	0.36
MI5FA25V1.6	L084006	250	1.6	Cos $\mu \geq 0.2^{***}$	0.39	0.9	0.42
MI5FA25V2	M084007	250	2	Cos $\mu \geq 0.2^{***}$	0.81	1.9	0.37
MI5FA25V2.5	N084008	250	2.5	Cos $\mu \geq 0.2^{***}$	1.44	3.2	0.34
MI5FA25V3.15	P084009	250	3.15	Cos $\mu \geq 0.2^{***}$	2.46	5.5	0.33
MI5FA25V4	Q084010	250	4	Cos $\mu \geq 0.2^{***}$	4.6	10	0.31
MI5FA25V5	R084011	250	5	Cos $\mu \geq 0.2^{***}$	11	25	0.24
MI5FA25V6.3	S084012	250	6.3	Cos $\mu \geq 0.2^{***}$	23	50	0.2
MI5FA25V8	T084013	250	8	Cos $\mu \geq 0.2^{***}$	2.5	40	0.1
MI5FA25V10	V084014	250	10	Cos $\mu \geq 0.2^{***}$	4.5	70	0.095
MI5FA25V12.5	W084015	250	# 12.5	Cos $\mu \geq 0.2^{***}$	8.1	120	0.09
MI5FA12.5V14	F085933	125	14	Cos $\mu \geq 0.7^{****}$	-	-	-
MI5FA12.5V16	R084034	125	# 16*	Cos $\mu \geq 0.7^{****}$	25	160	0.062
MI5FA12.5V20	D084022	125	# 20*	Cos $\mu \geq 0.7^{****}$	51	330	0.056

\* Non-certified rating

\*\*250VAC 4kA Cos  $\mu \geq 0.7$

\*\*\*250VAC 30kA Cos  $\mu \geq 0.2$  for approvals (UL 198G) I<sub>c</sub> = 10kA under 250VAC Cos  $\mu \geq 0.7$

\*\*\*\*10kA 125V Cos  $\mu \geq 0.7$

# For these ratings, heating within fuse holders must be checked

## Miniature Fuses

Very HRC Fuses 5x20  
 FA/FB Very Fast Acting  
 125V to 250V from 0.04 to 20A



### Time Current Curves

